

A B C D E F G H I J K L

1

2

3

4


5

6

7

8



9

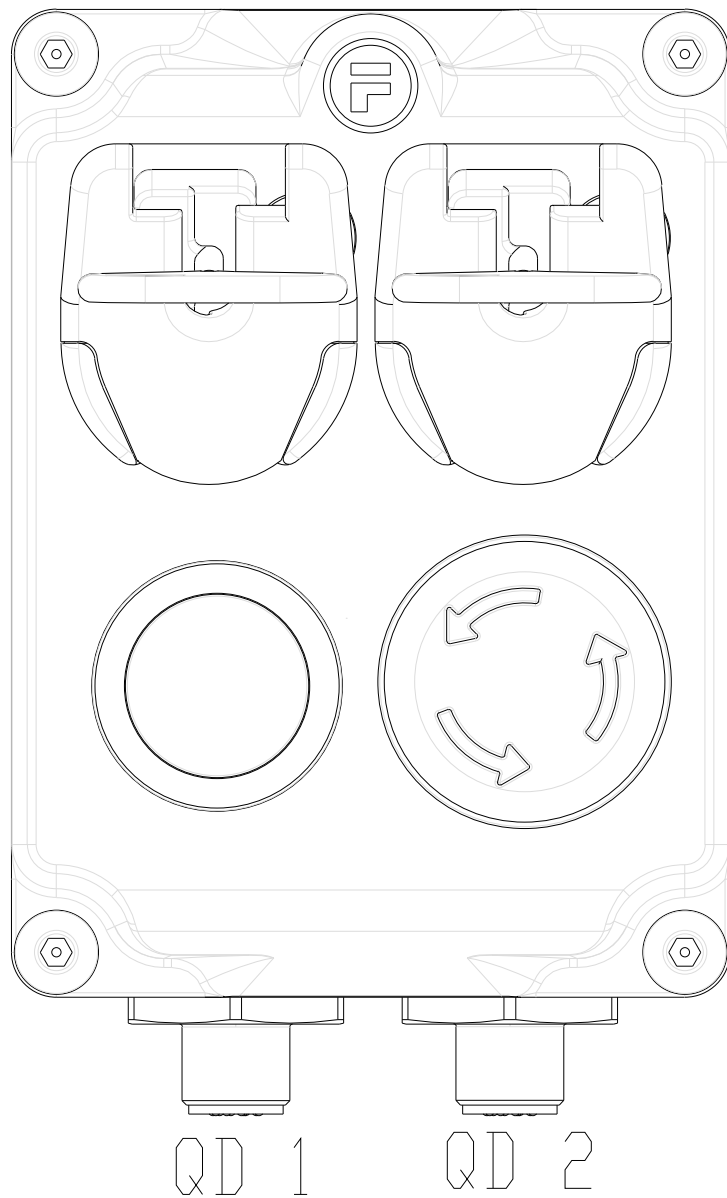

RSK WITH A PUSHBUTTON AND AN E-STOP WITH 2 x D7 CONNECTORS

DESCRIPTION	QD 1 PIN	QD 1 WIRE COLOUR	QD 2 PIN	QD 2 WIRE COLOUR
SOLENOID DRIVE	4	YELLOW		
SOLENOID MONITOR	8	RED		
0V	7	BLUE		
GATE MONITOR	9	ORANGE		
+24V	2	BROWN		
SS11	10	TAN		
SS12	6	PINK		
SS21	1	WHITE		
SS22	5	GREY		
EARTH	3	GREEN		
PUSHBUTTON OUTPUT 1			4	YELLOW
PUSHBUTTON OUTPUT 2			8	RED
PUSHBUTTON LAMP			7	BLUE
E-STOP SS12			9	ORANGE
E-STOP LAMP/MONITOR			2	BROWN
E-STOP SS22			10	TAN
E-STOP SS21			6	PINK
E-STOP SS11			1	WHITE

*REMAINING PINS ARE CUT & SEALED

<p>THE COPYRIGHT OF THIS DRAWING BELONGS TO FORTRESS INTERLOCKS Ltd. THE CONTENT OF THIS DRAWING IS CONFIDENTIAL AND MUST NOT BE DISCLOSED TO ANY 3rd PARTY WITHOUT OUR SPECIFIC, WRITTEN APPROVAL.</p>		<p>TITLE: STANDARD WIRING DIAGRAM FOR A RSK POD WITH A PUSHBUTTON AND AN E-STOP</p>		<p>SCALE: N/A</p>		<p>ISSUE: 0</p>	
 <p>FORTRESS www.fortress-safety.com</p>		<p>DO NOT SCALE. IF IN DOUBT ASK! ALL DIMENSIONS ARE IN mm (UOS) REMOVE ALL SHARP EDGES, BURRS AND FLASH</p>		<p>DWG NO: TRSK03</p>		<p>RELEASE LEVEL: Approved For Production</p>	
 <p>ORIGINAL SIZE A3</p>		<p>PART NO: TRSK03</p>		<p>DATE: 12-10-21</p>		<p>DRAWN BY: Liam O'Sullivan</p>	
		<p>MATERIAL: UNSPECIFIED</p>		<p>CHECKED BY: Michael Trice</p>		<p>SHEET: 1 OF 1</p>	
		<p>FINISH: UNSPECIFIED</p>		<p>GENERAL TOLERANCE: ± 0.1 / ± 0.5</p>			